

SUPERAUTOMATIC TYRE CHANGER WITHOUT A LEVIER



10÷26" in diameter
and 14" wide

Solid
and sturdy

Intensive
use

AS 944 LL è uno smontagomme super automatico equipaggiato con un dispositivo esclusivo che consente all'operatore il montaggio e lo smontaggio di qualsiasi tipo di pneumatico, senza ausilio di alcuna leva e senza il minimo sforzo fisico dell'operatore, "Senza Leva". Solida e robusta, è particolarmente adatta per un uso intensivo. L'alta qualità della componentistica utilizzata ed i severi test di collaudo rendono la macchina estremamente

affidabile e riducono al minimo i costi di manutenzione. AS 944 LL è disponibile a richiesta con doppia velocità di rotazione (6,5-15 r.p.m) e con dispositivo gonfiatubeless. Inoltre, è possibile equipaggiarla con il dispositivo di aiuto Sistema Super RM e il dispositivo omologato per il montaggio e smontaggio dei pneumatici Pax System Michelin, Pirelli, Goodyear e Dunlop.

GENERAL FEATURES

TOOL HEAD

This **demounting device Without Lever**, when applied to the removal system, completely eliminates the need for physical effort by the operator and guarantees maximum safety for the rim and the tyre



Clamping the rim on the turntable with the aid of the RM2 rim clamping cone.



BEAD BREAKER

The bead breaker arm **allows an opening up to 410 mm**, and is fitted with a stroke regulator to eliminate the risk of crushing the tyre.

The bead breaker is operated by a **double-acting pneumatic cylinder** made from 100% stainless steel, generating a **power of 15500 N** on the blade.

Another important innovation is the introduction of a **double adjustment for the inclination of the bead breaking blade**. This adjustment acts in two different directions: up-down and inside-outside.

Thanks to these adjustments, the bead breaking arm will always be in the best possible position.



AUTOCENTRANTE

The **AS 944 LL** has a new-concept turntable with mechanism designed to assure high performance over time. In spite of the breadth of its working range (10"- 26"), the turntable is compact and has 2 working positions: the first from 10" to 24", the second from 13" to 26".

For a better functioning of the **"WITHOUT LEVER"** technology, the combination with **SUPER RM NEWS** is always recommended.



Available version



SUPER RM 2 EAGLE



Photo of AS944 complete with optional accessories SUPER RM NEW, RM2, RM3, Airtronic and the wheel lifter SL80 A.

Recommended for RUN FLAT tyres:



TECHNICAL DATA



Turntable	
Inside clamping capacity	13" ÷ 26"
Outside clamping capacity	10" ÷ 24"
Maximum tyre diameter	1040 mm (41")
Maximum tyre width	14"
Rotation torque	1200 Nm
Rotation speed	8,5 rpm / 6-15 rpm (2V)
Bead breaker	
Maximum opening	410 mm
Shoe force	15.500 N - 10bar
Power supply	
Electric motor three-phase	230-400V 50/60Hz 0,75kW
Electric motor single-phase 2V	230V 50/60Hz 0,75kW
Electric motor single-phase	115-230V 50/60Hz 0,75kW

EQUIPMENT



Photographs, features, and technical specifications are not binding and may be subject to change without notice.

DIMENSIONS

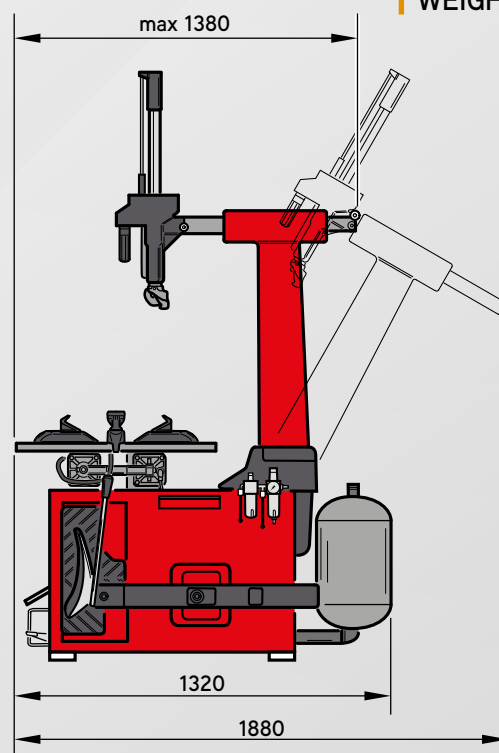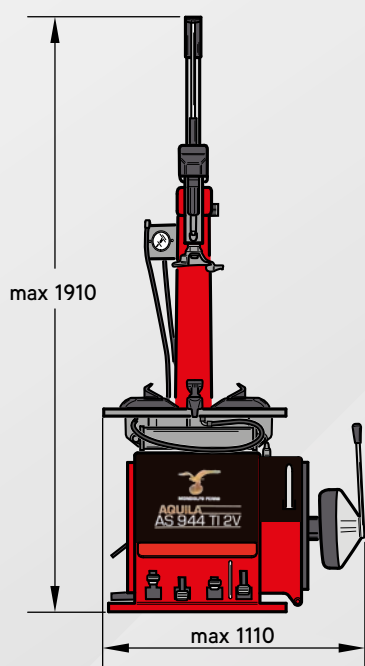

WEIGHT: 274 kg
288 kg TI