

VERSATILE AND UNIVERSAL
LIFTING EXPERIENCE!



Electro-hydraulic two post lifts

Asymmetric installation for better door-opening angle

This lift has been designed, developed and manufactured
according to recommendations of EN1493:2022



STRUCTURAL FEATURES

POSTS



- Stable, strong bend posts with internal reinforcement
- Designed in 2-parts to optimize transport and installation of the lift

- Low minimum height
- Lifting area with **3-stage arms**: from short wheelbase to medium wheelbase, including vans
- **Parallel parking of arms** in the rear for an easier positioning of vehicles

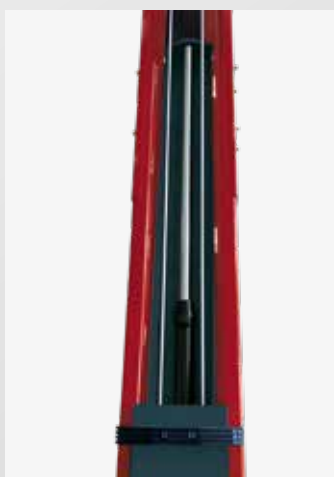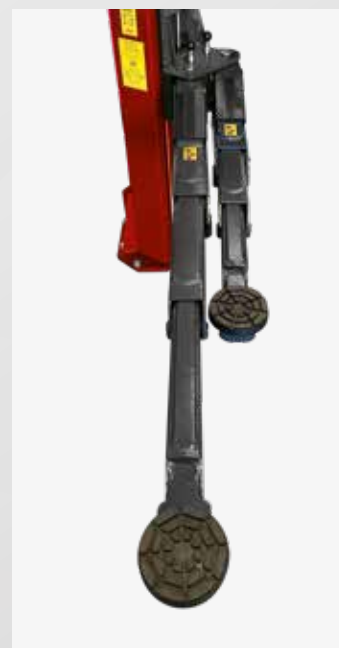

OPERATING SYSTEM

- Efficient hydraulic system with pushing cylinders
- Synchronization cables

PROTECTIONS

Rubbers for door-protection

Encapsulated arm rotation locking system with 360-degree toothed engagement, ensuring stability and safety




- CE safety stop before final descent: no foot guard bar required
- Electrical-operated mechanical **safety lock**



MAXIMUM INSTALLATION FLEXIBILITY

- Top crossbar with maximum height limit function, designed in two parts
- Top crossbar with adjustable mounting to reduce installation width **from 3500 mm to 3250 mm**, suitable for any workshop

OVERALL DIMENSIONS

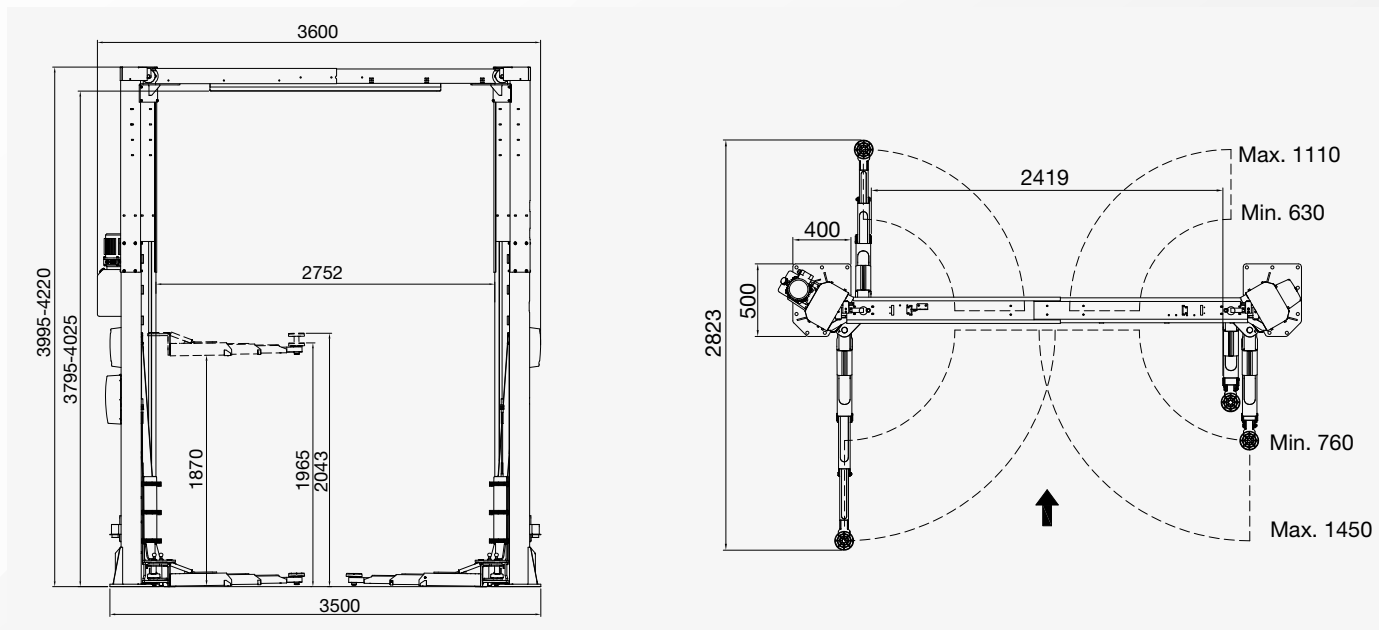

The manufacturer reserves the right to modify the features of its products at any time.

ACCESSORIES | DOTATION

Secondary lowering speed kit for slower and more controlled descent:

J213-4100000

Height extension 700 mm:

J213-4200000

Base-plate for installation – to reduce effective concrete thickness:

NX1316014


Lifting pads for ultra-low vehicles: minimum height 78 mm:

NX1316006

See separate catalogue for further accessories.

a. Double telescopic lifring pad with large adjustability range (up to 4 ton) - 95-174 mm

b. Extensions: 50 mm and 100 mm

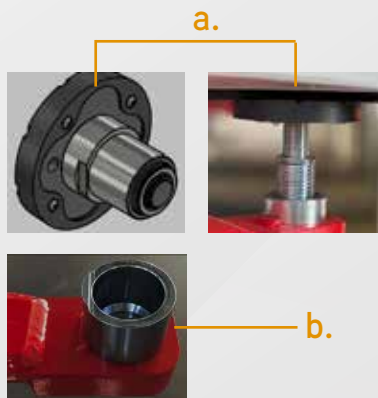

NEWS E-CAR ACCESSORIES



TECHNICAL DATA

Maximum capacity	4000 kg
Lift height	3995 - 4220 mm
Mounting width	3500 - 3250 mm
Minimum useful height	95 mm
Maximum useful height	2043 mm
3-phase motor	400/230V - 3kW - 3Ph - 50/60Hz
1-phase motor	230V - 3kW - 1Ph - 50/60Hz
Minimum installation depth	100 - 140 mm*

*refer to installation drawings and user manual